
The Champion's Choice

Higher · Faster · Smarter

FOX ESS

Smart Meter

THREE-PHASE METER&6CT

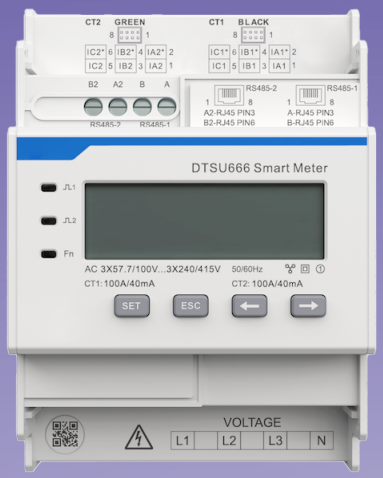

SIMPLE & EASY

Use a CT to measure current, saving installation time.

HASSLE-FREE

Pre-wired CT sets of 6 in a package for DC & AC coupling.

CT SELECTION

The changeable CT version supports up to 600A.

TECHNICAL SPECIFICATIONS

MODEL	DTSU666	
GENERAL DATA		
Dimension (L*W*H) [mm]	100×72×65.5	
Net weight [g]	Approx. 236	
Mounting type	DIN-Rail Mounting	
PERFORMANCE AND SPECIFICATION		
Nominal voltage [V]	3×57.7/100...3×240/415	
Nominal current [A/mA]	100/40, 200/40, 400/40, 600/40 (customizable)	
Frequency [Hz]	50/60	
Voltage range	0.8Un-1.15Un	
Accuracy class	Class I	
Power grid system	1P2W or 3P4W or 3P3W	
Baud rate [bps]	1200/2400/4800/9600 (default 9600) 19200/38400/115200 (optional)	
Temperature [°C]	-25~+55 (nominal), -40~+70 (ultimate)	
Certification	CE, SAA, RoHS, REACH	
CURRENT TRANSFORMER (CT)		
Type	Cable length [mm]	Net weight per CT*3 [g]
100A/40mA	6000±20 (customizable)	Approx. 380
200A/40mA	2000±20 (customizable)	Approx. 595
400A/40mA	2000±20 (customizable)	Approx. 1195
600A/40mA	2000±20 (customizable)	Approx. 2485