


# EP6

## HIGH VOLTAGE STORAGE BATTERY

The EP6 is a high-performance, scalable battery storage system. Its modular design allows for maximum flexibility, making it suitable for a broad range of storage applications. Additional batteries can be installed in parallel allowing for a maximum storage capacity of 23.04kWh.

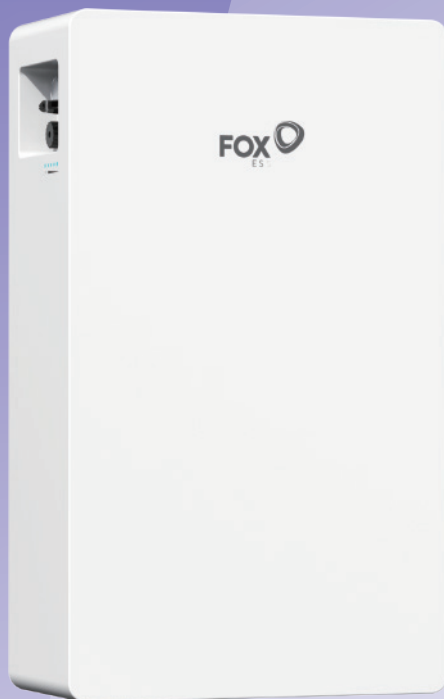

- Scalable to 23.04kWh
- 90% Depth of Discharge
- Floor or Wall Mounting
- Compact & Easy

### Installation

- IP65 Protection Level



**HIGH  
VOLTAGE**



**EASY  
INSTALLATION**



**HIGH  
EFFICIENCY**



**EXPANDABLE  
SYSTEM**



**90%  
DOD**



## TECHNICAL SPECIFICATIONS

SYSTEM NAME	EP6
MODEL	EP6 Plus
<b>ELECTRICAL CHARACTERISTICS</b>	
Battery Type	LFP (LiFePO <sub>4</sub> )
Nominal Energy [kWh]	5.76
Nominal Voltage [V]	192.0
Operating Voltage [V]	174.0 ~ 219.0
Max. Charge/Discharge Current [A]*1	30
Recommend Charge Current [A]	15
Peak Discharge Current [A]	65 @60s
Peak Charge Current [A]	36 @5s
Battery Pack Round-Trip Efficiency [%]	≥95
Depth of Discharge [%]	90
Communication	CAN
Display	LED*5
Scalability	Max. 4 Units in Parallel
<b>OPERATING CONDITIONS</b>	
Installation Location	Outdoor/ Indoor
Operating Temperature [°C]	Charge: 0 ~ 55, Discharge: -10 ~ 55
Operating Temperature [°C] (warm up function on, optional)	Charge: -25 ~ 55, Discharge: -25 ~ 55
Storage Temperature [°C]	-10 ~ 40
Cooling Method	Natural Convection
Humidity [%]	5 ~ 95 (No Condensation)
Altitude [m]	Max. 3,000
<b>PROTECTION</b>	
Fire Protection Function	YES
<b>MECHANICAL CHARACTERISTICS</b>	
Dimensions (W*H*D) [mm]	380*640*185
Weight [kg] (±5%)	51
Cell Net Weight [kg] (±5%)	35
<b>CERTIFICATES</b>	
Safety	IEC62619
EMC	EN IEC 61000-6-1/2/3/4
Transportation	UN38.3
Ingress Protection	IP65

\*1 The current is affected by temperature, cell voltage and SOC.